

EASY PHALT®

THE PERFECT **COLD ASPHALT**
FOR EVERY APPLICATION



VACUUM-PACKED

EASY PHALT® PRO 0/4 0/8

GRAIN SIZE

0/4

0/8

RECOMMENDED INSTALLATION DEPTH

2-4 CM

(more than 4 cm
install multi-layered)

3-5 CM

(more than 5 cm
install multi-layered)



EASY PHALT® BASIC 0/5

GRAIN SIZE

0/5

RECOMMENDED INSTALLATION DEPTH

2-4 CM

(more than 4 cm
install multi-layered)



EASY PHALT® AQUA 0/8

GRAIN SIZE

0/8

RECOMMENDED INSTALLATION DEPTH

3-5 CM

(more than 5 cm
install multi-layered)

VACUUM-PACKED



EASY PHALT® PRIME

Optimal bonding and substrate preparation for bitumen-based construction materials, deep intrusion, quick drying, based on bitumen and solvents.

YOUR PERSONAL EXPERT



W. MARKGRAF GMBH & CO KG

ASPHALTSTRASSENBAU
ZINST/ROTHENHOF 21
95508 KULMAIN | GERMANY

TEL +49 9642 9201-0
FAX +49 9642 9201-16
EMAIL info@easyphalt.eu



For more information on installation and processing, scan the QR code or visit:

www.easyphalt.eu/film



This information is a general guide based on average values and does not apply to applications under special conditions or demands. Suitability for the intended purpose and local conditions must be checked by the user in advance. We deliver and adhere exclusively to our terms of sale and delivery.

Stand 06 | 2018
WWW.FBBERFEL.DE

EASY PHALT®

THE PERFECT **COLD ASPHALT**
FOR EVERY
APPLICATION



EXTRA LONG LASTING

PRODUCT INFORMATION

EASYPHALT®
QUALITY PRODUCTS FROM

MARKGRAF

AREAS OF APPLICATION

EASYPHALT® BASIC is ideal for temporary asphalt repairs on low-traffic roads, secondary roads and sidewalks.

EASYPHALT® PRO meets the highest load requirements and is suitable for repairs on roads with high traffic, secondary roads, parking lots, driveways as well as industrial traffic areas. In addition, EASYPHALT® PRO is perfect for closing the road surface after civil engineering works as well as road connections next to and between tracks (trams, railway crossings, etc.) and for the connection of manhole covers. Installation is even possible on damp surfaces.

EASYPHALT® AQUA meets the highest demands in terms of load, is permeable to water and is especially suitable for repairing water-permeable, noise-reducing asphalt on roads with high traffic loads, secondary roads, parking lots, driveways as well as industrial traffic areas. Installation is even possible on damp surfaces.

PROPERTIES

Our EASYPHALT® products are ready to use and can handle traffic or loads immediately after installation. They consist of environmentally friendly raw materials, are ecologically friendly, solvent-free and recyclable.



The quality requirements are checked as part of the factory production control and externally monitored by LGA Bautechnik GmbH. All EASYPHALT® products are certified based on DIN 18200.

INSTALLATION

EASYPHALT® BASIC, **EASYPHALT® PRO** and **EASYPHALT® AQUA** can be installed year-round at temperatures between -20°C and +45°C. Before installation, please store at room temperature.




Before installation remove any dirt from the surface.



RECOMMENDATION: For maximum durability, we advise that you treat the installation surface with a bituminous primer like **EASYPHALT® PRIME**.

CONSUMPTION & PACKAGING

EASYPHALT® BASIC, **EASYPHALT® PRO** and **EASYPHALT® AQUA** are available in buckets of 25 kg each (equivalent to 1 m² at an installation depth of 1 cm). The shelf life is 12 months in the unopened bucket. The shelf life of vacuum-packed goods increases to 18 months.

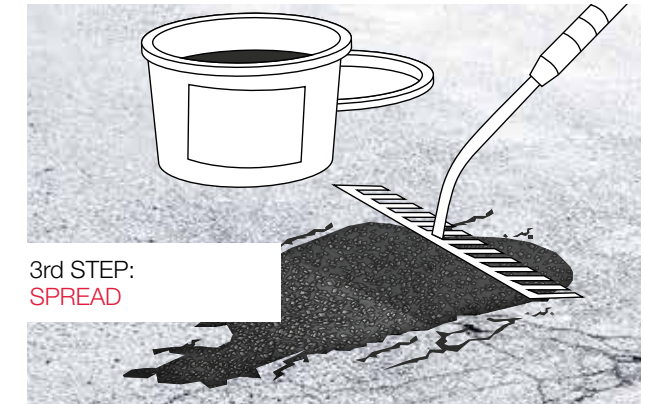

Spread the required amount of EASYPHALT® slightly protruding the height of the original surface.



EASYPHALT® PRO and **EASYPHALT® AQUA** soak with water (about 5 litres of water per 25 kg bucket). Compress all EASYPHALT® with a roller, vibratory plate or hand tamper. The surface can be approved for traffic immediately after installation.