

## Bituminous Primer



### EASYPHALT PRIME

#### PROPERTIES

Optimal bonding and substrate preparation for bitumen-based construction materials, deep intrusion, quick drying, based on bitumen and solvents.

#### INTENDED USE

**EASYPHALT PRIME** serves as a primer for bituminous road materials, joint tapes, crack tapes, bituminous fillers and bituminous adhesive compositions, bitumen coatings as well as welded asphalt sheetings.

#### ADDITIONAL APPLICATIONS

- Hot mix
- Joint tape
- Crack tape
- Bituminous fillers and bituminous adhesive compositions
- Bitumen coatings
- Welded asphalt sheetings

## Top quality for the highest demands

The formulations for **EASYPHALT BASIC**, **EASYPHALT PRO** and **EASYPHALT AQUA** are developed in our own laboratory.

The quality requirements are checked as part of the factory production control and externally monitored by LGA Bautechnik GmbH.

EASYPHALT products enable the quick and easy repair of potholes, pavement distress and boil holes.

The processing can be done year-round at temperatures between -20 °C and +45 °C. Before installation, please store at room temperature.

EASYPHALT products are ready to use and can be approved for traffic immediately after installation.

## Competence and innovation for maximum safety on your roads!

All EASYPHALT products are certified based on DIN 18200.



## User information

This information is a general guide based on average values and does not apply to applications under special conditions or demands. Suitability for the intended purpose and local conditions must be checked in advance by the user. We deliver and adhere exclusively to our terms of sale and delivery.



For more information on installation and processing, scan the QR code or visit:

[www.easyphalt.eu/film](http://www.easyphalt.eu/film)

#### YOUR PERSONAL EXPERT



#### W. MARKGRAF GMBH & CO KG

ASPHALTSTRASSENBAU  
ZINST/ROTHENHOF 21  
95508 KULMAIN | GERMANY

TEL +49 9642 9201-0  
FAX +49 9642 9201-16  
EMAIL [info@easyphalt.eu](mailto:info@easyphalt.eu)

# EASYPHALT®

THE PERFECT  
**COLD ASPHALT**  
FOR EVERY  
APPLICATION



EASYPHALT®  
QUALITY PRODUCTS FROM

**MARKGRAF**





# EASY PHALT®

The solution for potholes, road damage, cracks due to freezing!

fast | uncomplicated | solvent-free

Get the success you want with little effort:



1st STEP:  
SWEEP OFF

Before installation remove any dirt from the surface.



3rd STEP:  
SPREAD

Spread the required amount of EASYPHALT® slightly protruding the height of the original surface.



2nd STEP:  
PRE-SPRAY  
(recommended - not mandatory)

RECOMMENDATION: For maximum durability, we advise that you treat the installation surface with a bituminous primer like **EASYPHALT® PRIME**.




4th STEP:  
MOISTEN AND COMPRESS  
(Moisten only if using **EASYPHALT® PRO** and **EASYPHALT® AQUA**)

**EASYPHALT® PRO** and **EASYPHALT® AQUA** soak with water (about 5 litres of water per 25 kg bucket). Compress all EASYPHALT® with a roller, vibratory plate or hand tamper. The surface can be approved for traffic immediately after installation.

For further information, please refer to the product information.

Our products in comparison

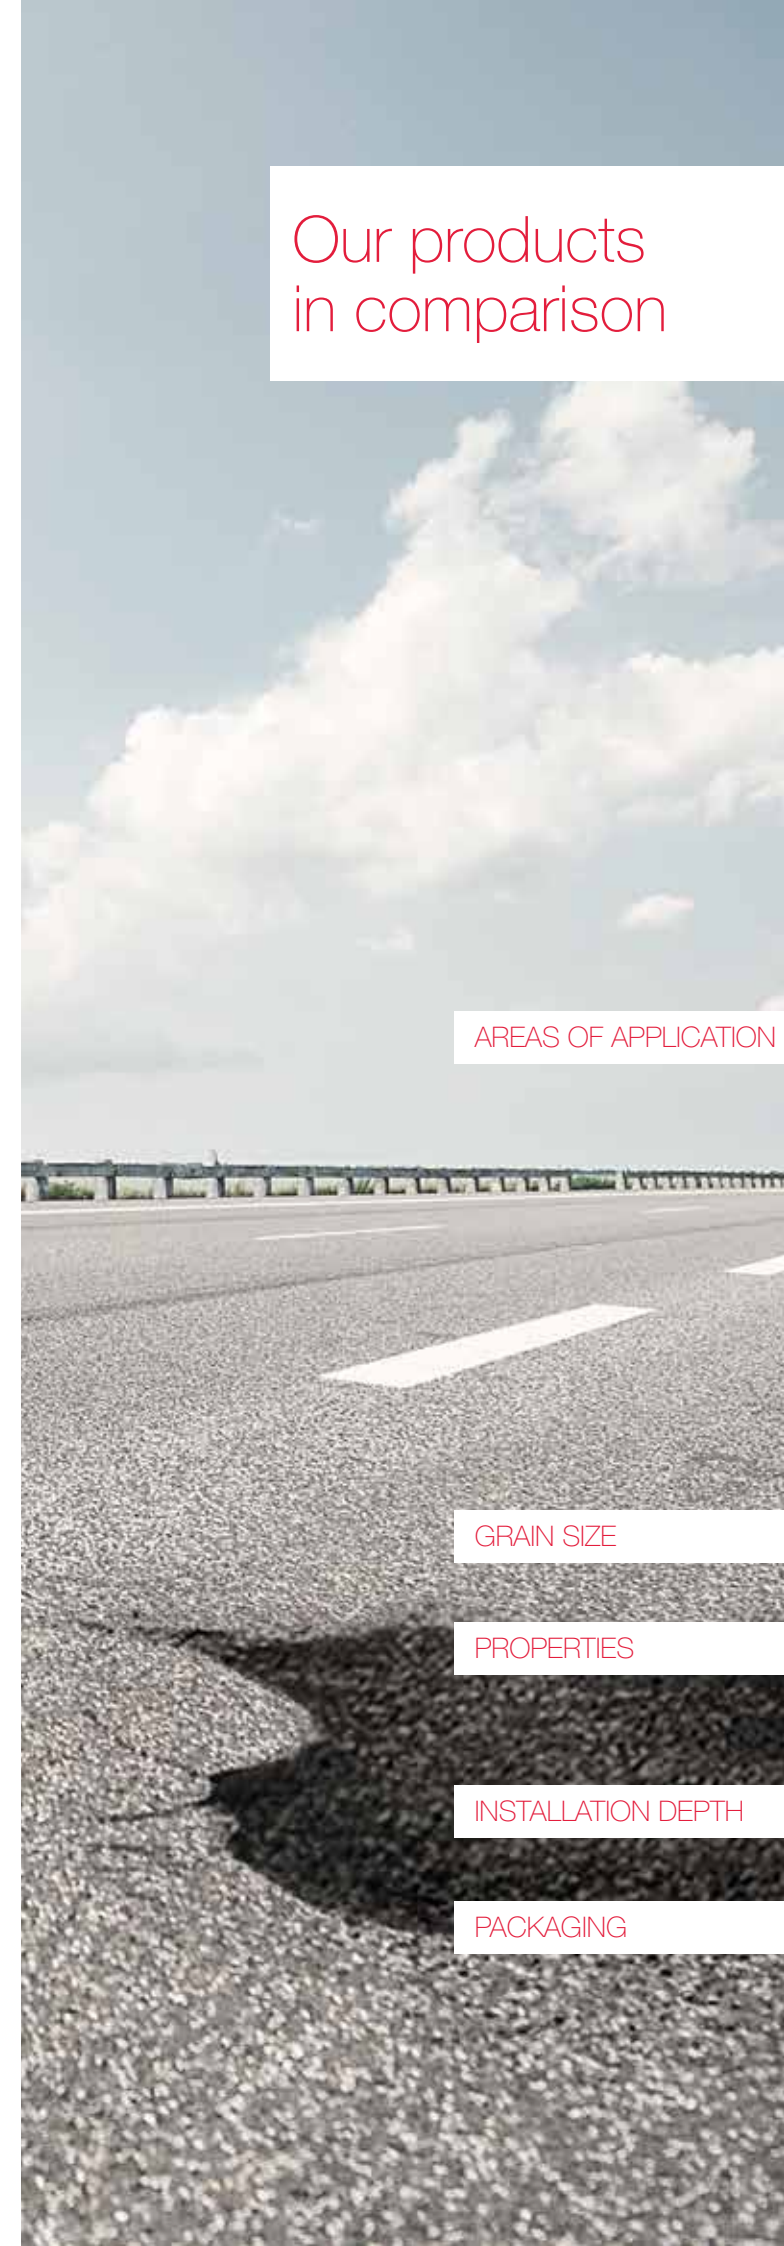

## AREAS OF APPLICATION

## GRAIN SIZE

## PROPERTIES

## INSTALLATION DEPTH

## PACKAGING



## EASY PHALT® BASIC 0/5

The cold mixture for low traffic areas.

**EASYPHALT® BASIC** is ideal for temporary asphalt repairs on low-traffic roads, secondary roads and sidewalks.

Perfect for cost-effective and temporary repairs of traffic surfaces.

● 0/5

ready to use, solvent-free, stable, ready for traffic immediately

● 2 - 4 cm



Bucket, 25 kg



## EASY PHALT® PRO 0/4 EASY PHALT® PRO 0/8

The high-performance cold mixture for low, medium and high load traffic surfaces.

**EASYPHALT® PRO** meets the highest load requirements and is suitable for repairs on roads with high traffic loads, secondary roads, parking lots, driveways as well as sidewalks and industrial traffic areas. In addition, EASYPHALT® PRO is perfect for closing the road surface after civil engineering works as well as for road connections next to and between tracks (trams, railway crossings, etc.) and for the connection of manhole covers. Installation is even possible on damp surfaces.

● 0/4

ready to use, permanent, extremely durable, solvent-free, reactive, ready for traffic immediately

● 2 - 4 cm



Bucket, 25 kg vacuum-packed



## EASY PHALT® AQUA 0/8

The water-permeable high-performance cold mixture for open-pored, sound-reducing, low, medium and high load traffic surfaces.

**EASYPHALT® AQUA** meets the highest demands in terms of load, is permeable to water and is especially suitable for repairing water-permeable, noise-reducing asphalt on roads with high traffic loads, secondary roads, parking lots, driveways as well as industrial traffic areas. Installation is even possible on damp surfaces.

Specially designed for the repair of water-permeable, noise-reducing asphalt.

● 0/8

ready to use, permanent, extremely durable, solvent-free, reactive, ready for traffic immediately

● 3 - 5 cm



Bucket, 25 kg vacuum-packed



LGAM  
Güterüberwachung  
DIN 18200



LGAM  
Güterüberwachung  
DIN 18200



LGAM  
Güterüberwachung  
DIN 18200